

COAL HANDLING APPARATUS

u

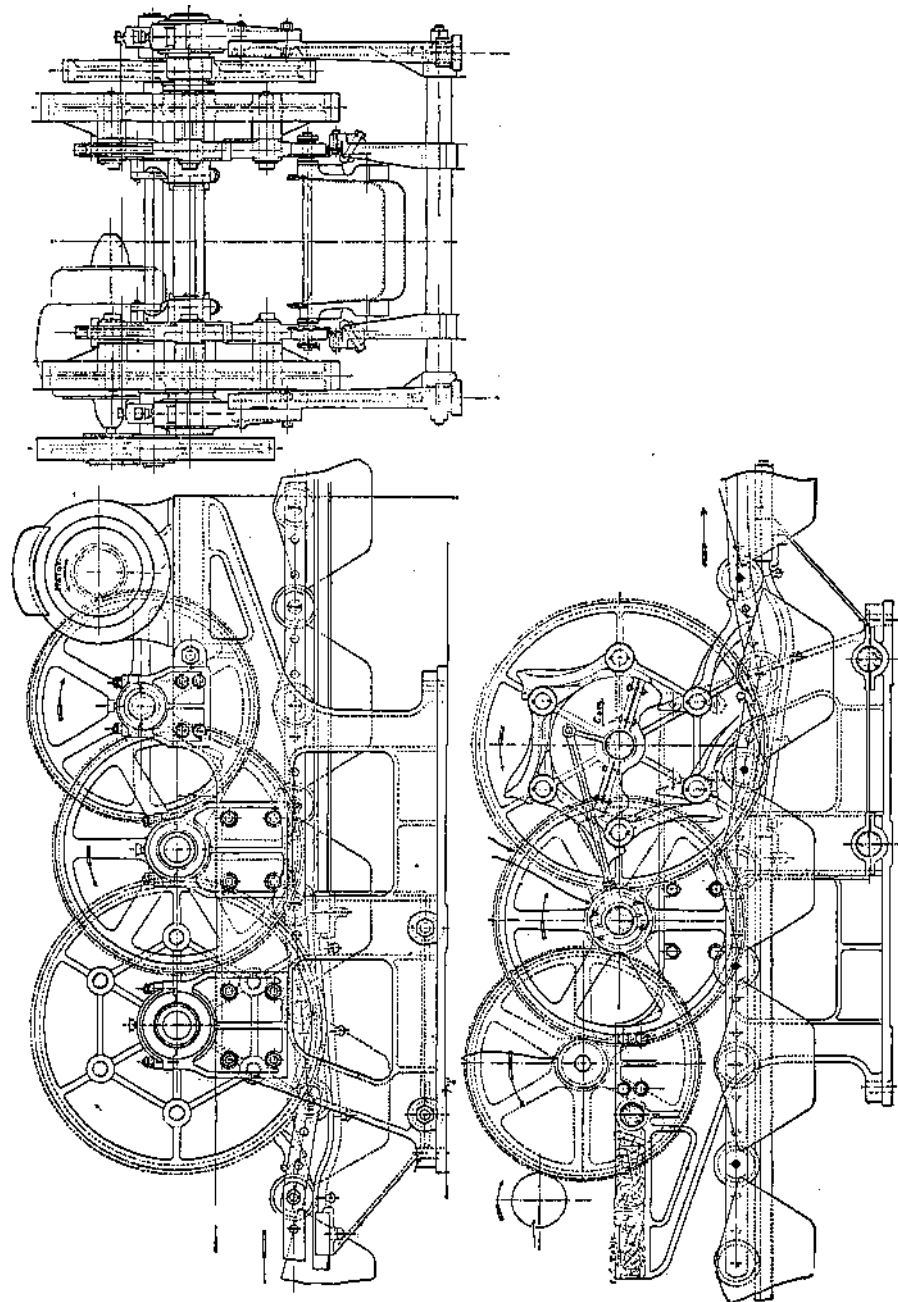


Fig. 7.—Conveyor Drive

is provided with five openings arranged to coincide with the conveyor buckets when the filler is rotated. The rotation of the filler is effected by the teeth on the sprocket wheel (seen on the side of the filler) engaging with the links of the conveyor chain. It will be seen that no separate driving mechanism